


# IPWB3MIRVF

## 3MP IR WDR Bullet Camera


### Specifications

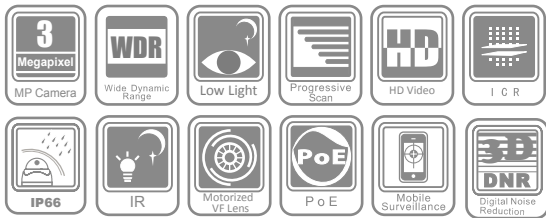

### Key features

- 3.0 Megapixel (2048 x 1536) High Resolution
- HD1080p Real-time Streaming
- 120dB Wide Dynamic Range
- 3D Digital Noise Reduction
- True Day / Night
- IP66
- Up to 30m IR Range

### Dimensions

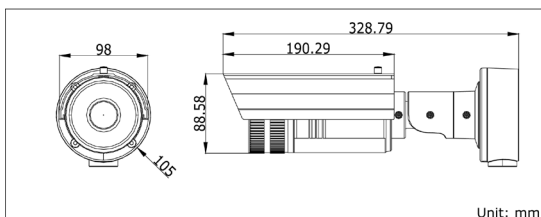

| Camera                      | IPWD3MIRVF  |
|-----------------------------|---|
| Image sensor                | 1/3" progressive scan CMOS  |
| Min. illumination           | 0.17 lux @F1.6, AGC ON<br>0 lux with IR   |
| Shutter time                | 1/30 s ~ 1/100,000 s  |
| Lens                        | 2.7 ~ 9 mm @F1.6, angle of view: 101° ~ 30.4°   |
| Lens mount                  | Φ14   |
| Auto iris                   | DC drive  |
| Day & night                 | IR cut filter with auto switch  |
| Wide dynamic range          | 120 dB  |
| Digital noise reduction     | 3D DNR  |
| <b>Compression Standard</b> |   |
| Video compression           | H.264 / MPEG4 / MJPEG   |
| Bit rate                    | 32 Kbps ~ 16 Mbps   |
| Audio Compression           | -S: G.711/G.726   |
| Dual stream                 | Yes   |
| <b>Image</b>                |   |
| Max. Image Resolution       | 2048 × 1536   |
| Frame rate                  | 15fps (2048 × 1536), 30fps (1920 × 1080), 30fps (1600 × 1200)                                 |
| Image settings              | Saturation, brightness, contrast adjustable through client software or web browser            |
| <b>Network</b>              |   |
| Network storage             | NAS   |
| Alarm trigger               | Motion detection, tampering alarm, network disconnect, IP address conflict, storage exception |
| Protocols                   | TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos     |
| Security                    | User authentication, watermark  |
| <b>Interface</b>            |   |
| Communication interface     | 1 RJ45 10 M / 100 M Ethernet interface  |
| <b>General</b>              |   |
| Operating conditions        | -10 °C ~ 60 °C (14°F ~ 140 °F) humidity 90% or less (non-condensing)                          |
| Power supply                | 12 VDC ± 10% , PoE (802.3af)  |
| Power consumption           | Max. 12W  |
| Weather proof rating        | IP66  |
| IR range                    | Approx 20 to 30 meters  |
| Dimensions                  | 98 × 88.58 × 328.79 mm (3.86" × 3.49" × 12.94")   |
| Weight                      | 1700 g (3.75 lbs)   |